Standard Silicon Rectifiers

Reverse Voltage - 100 to 1000 V
Forward Current – 2.5 A

FEATURES

- For surface mounted applications
- Low profile package
- Open Junction chip
- High forward surge current capability
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: DO-15
- Terminals: Solderable per MIL-STD-750,

FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

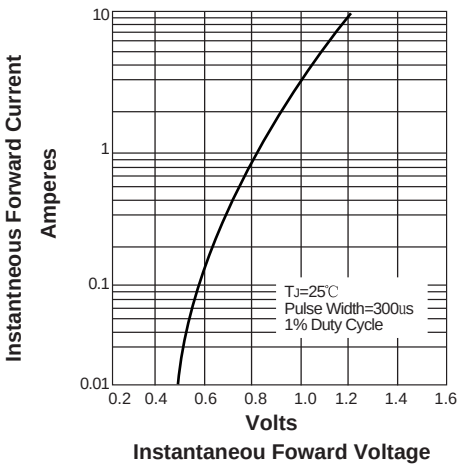

FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

