FR101WS THRU FR107WS SOD-323FL

Surface Mount Fast Recovery Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 1 A

Pinning

1.Cathode	2.Anode





FEATURES

- Low forward voltage drop
- Low leakage current
- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: SOD-323FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 4.5mg /0.00016oz

Fig.2 Typical Instaneous Reverse Characteristics

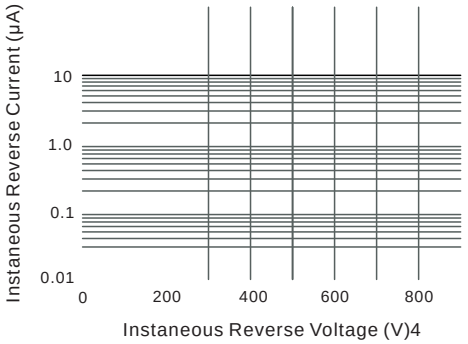

Fig.3 Typical Forward Characteristic

