DSL24W SOD-123FL

Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 40 V

Forward Current - 2 A

FEATURES

Metal silicon junction, majority carrier conduction
For surface mounted applications
Low power

SOD-123FL

YFW SL24

at 2

Marking Diagram

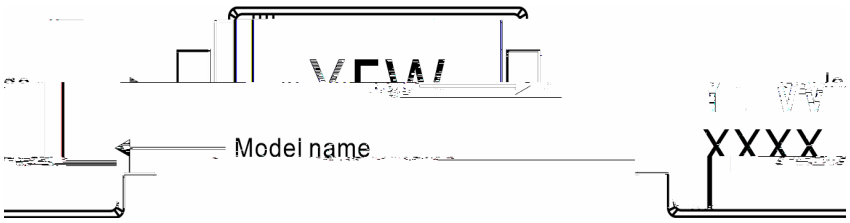

Ordering information

Package	Packing Description	Packing Quantity
SOD-123FL	Tape/Reel,13"reel	10000PCS/Reel 100000PCS/Carton
	Tape/Reel,7"reel	3000PCS/Reel 120000PCS/Carton

Package Dimensions

SOD-123FL

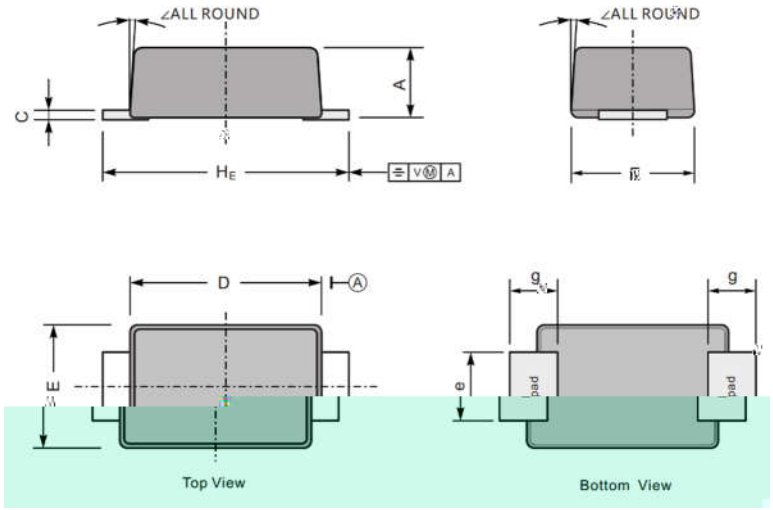

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	0.9	1.3	35	43
C	0.12	0.20	4.7	7.9
D	2.6	2.9	102	114
E	1.7	1.9	67	75
e	0.8	1.1	31	43
g	0.7	0.9	28	35
HE	3.5	3.8	138	150
∠	7°			

The recommended mounting pad size

