

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Built-in strain relief,ideal for automated placement
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed 260°C/10 seconds at terminals

- Case : Molded plastic body
- Terminals : Solder plated, solderable per MIL-STD-750,Method 2026
- Polarity : Polarity symbol marking on body
- Mounting Position : Any
- Wb

YFW SSL1040

YFW SSL1045

YFW SSL1050

YFW SSL1060

YFW SSL1080

YFW SSL10100

0
20
40
60
80
100

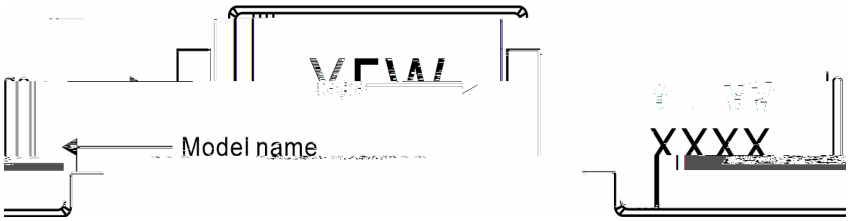

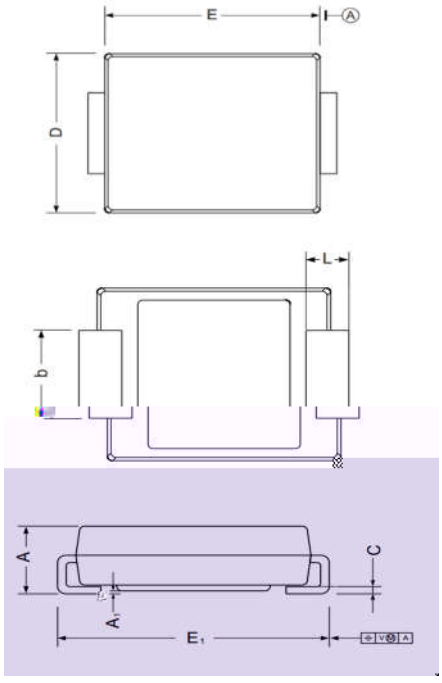

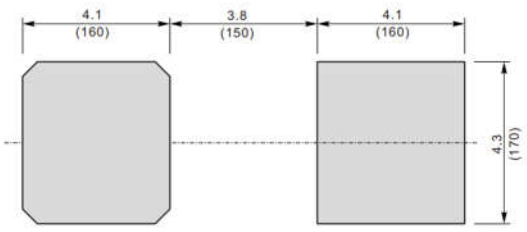

Unit : mm (mil)

The information presented in this document is for re