Super Fast Silicon Rectifiers

220

1.65

Ratings and Characteristic Curves

Fig. 1 - Forward Current Derating Curve

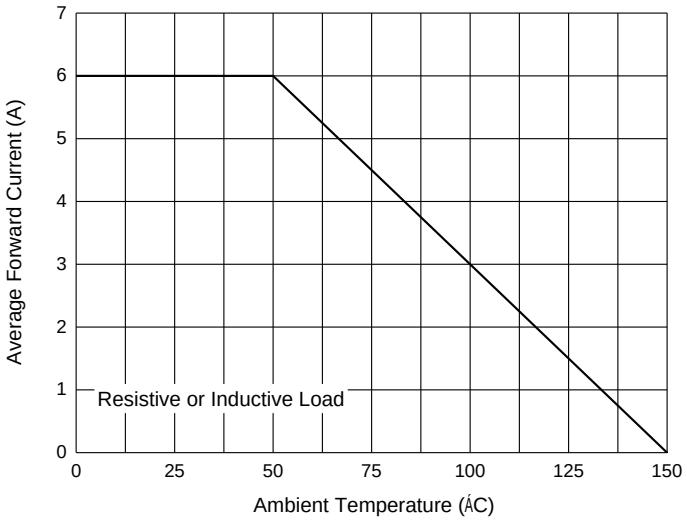

Fig. 2 - Maxim Non-Repetitive Peak Forward Surge Current

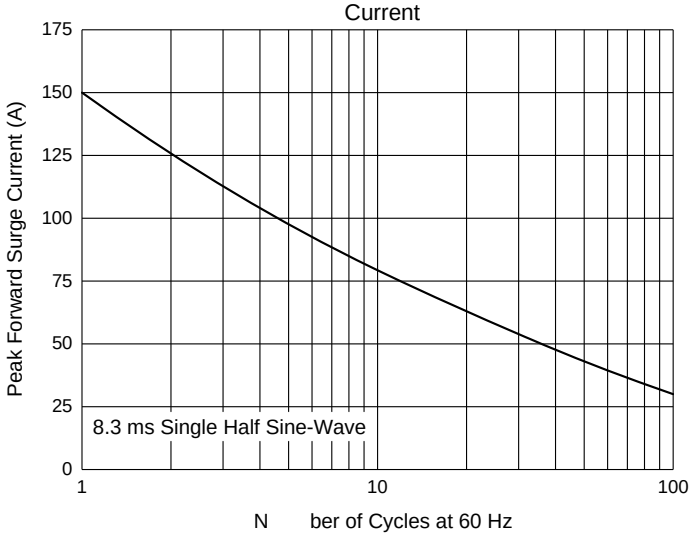

Fig. 3 - Typical Instantaneous Forward Characteristics

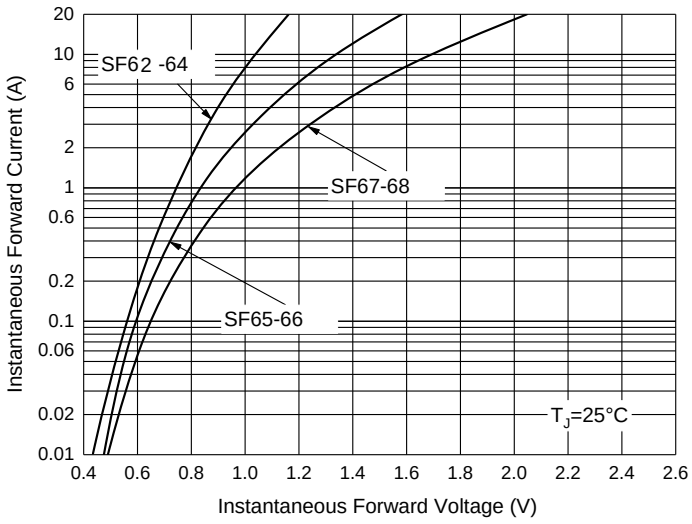

Fig. 4 - Typical Reverse Leakage Characteristics

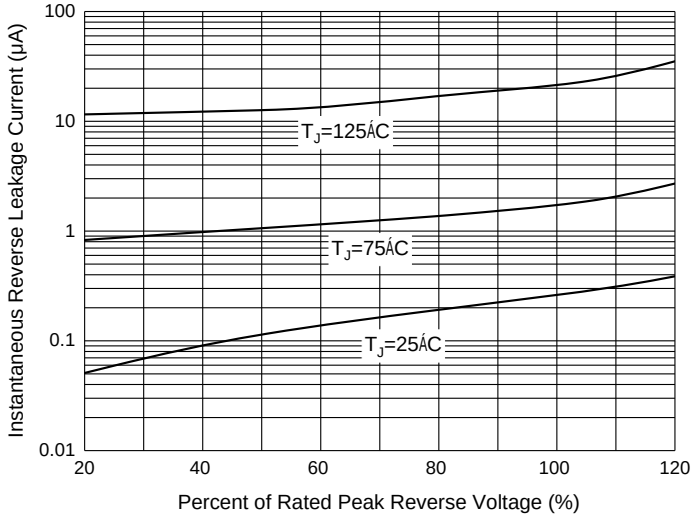

		0P / 00P /Inn 000P / n
		000P / 0P /Inn 0000P / 00P / n

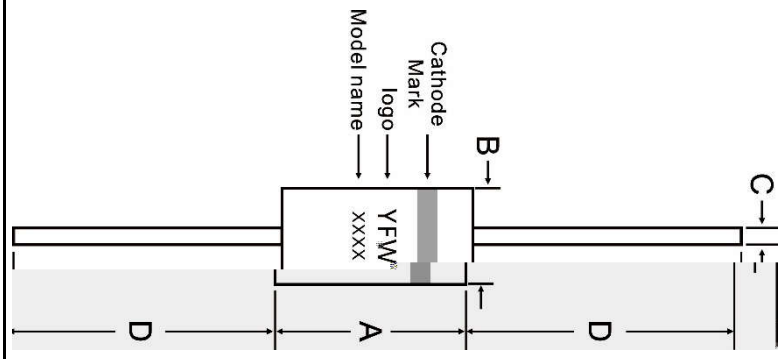

		0		0 0
		0		0 0
	0	0	0 0	0 0
			00	

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices),YFW or anyone on its behalf, assumes no resp l ety or