FIG 1.Derating Curve For Output Rectified Current

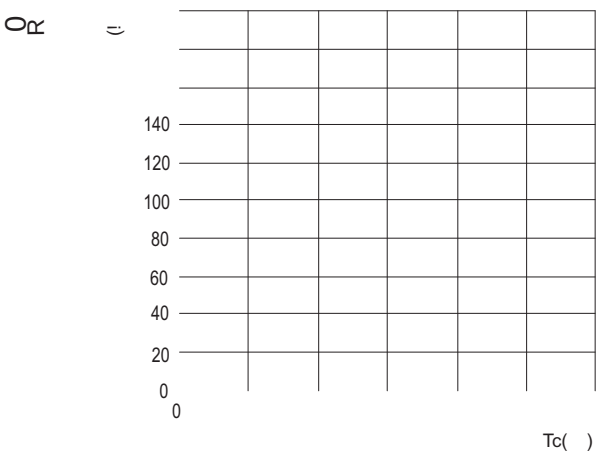


FIG2 .Maximum Non-Repetitive Peak Forward Surge CurrentPer Bridge Element



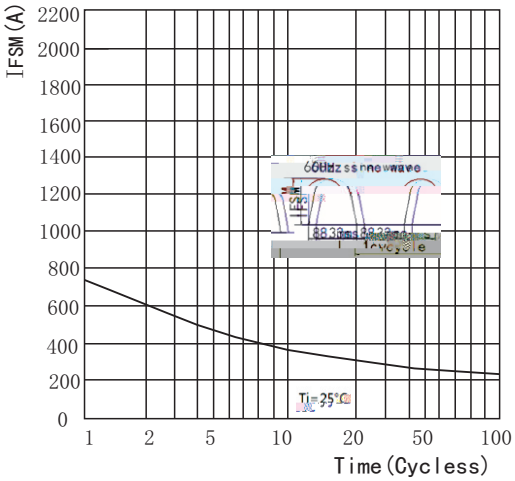


FIG3.Typical Reverse Characteristics Per Bridge Element

FIG4.Typic al Forward Characteristics Per Bridge Element

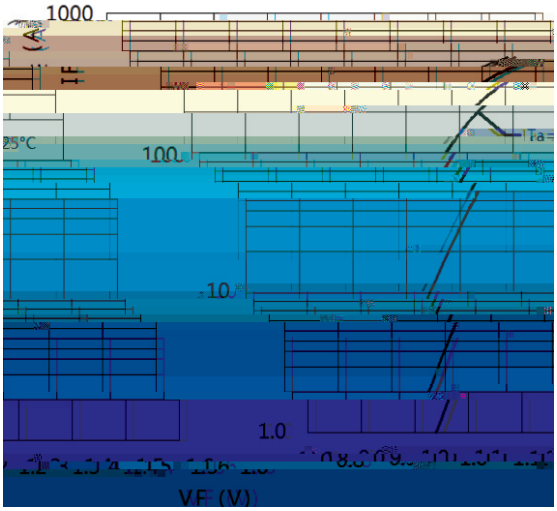

Marking Diagram

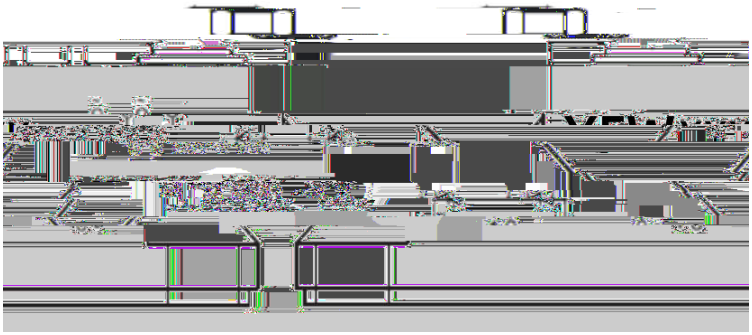


Ordering information

Model name	Package	Unit Weight	Base Quantity
MDQ60-XX	M32	-	10pcs/ Box

Package Dimensions

M32

unit: Millimeter

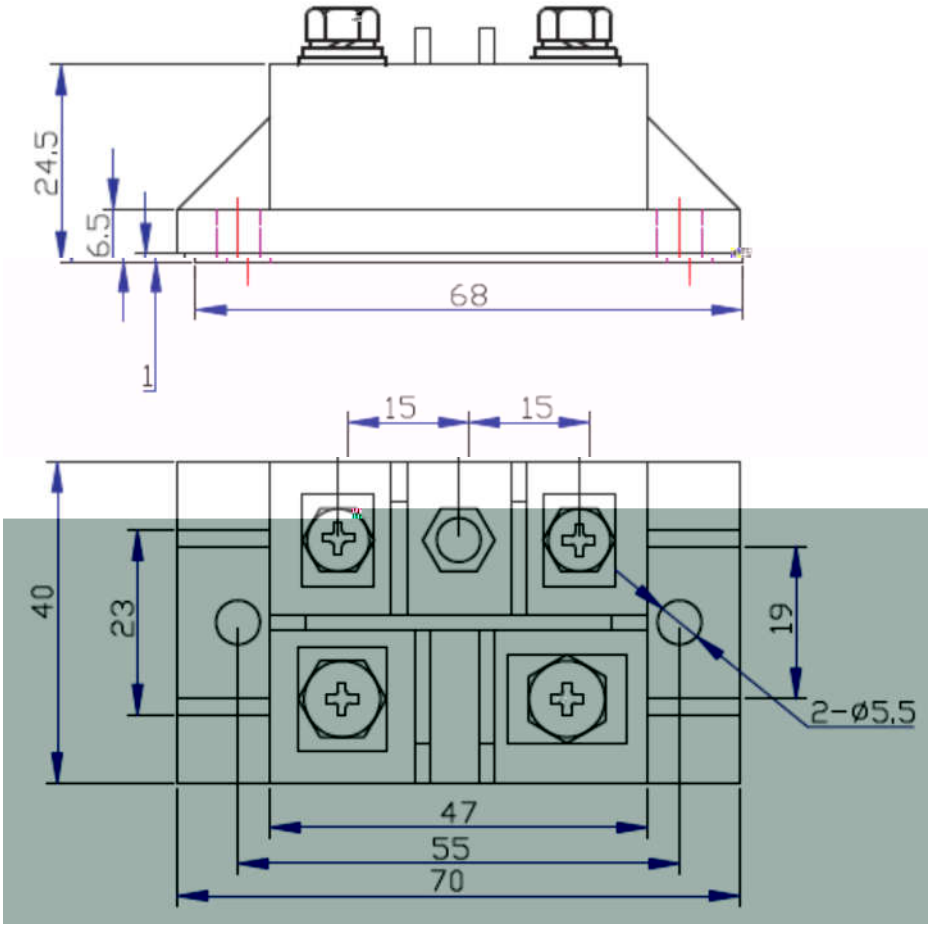

The information presented in this document