
- Low reverse leakage
- High forward surge capability
- High reliability
- High temperature soldering guaranteed:260°C/10seconds
- Lead and body according with RoHS standard
- Green compound with suffix "-F" on Marking

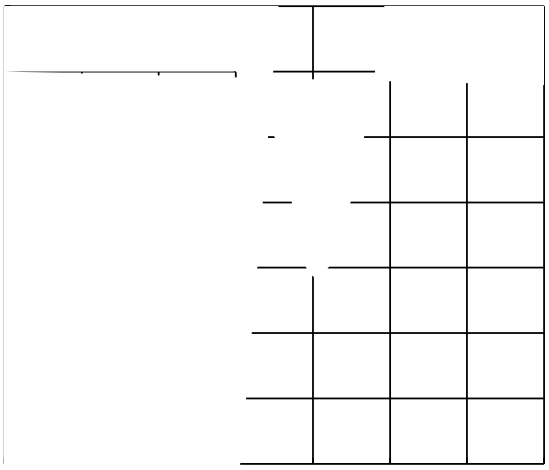

Tamb, ambient temperature (°C)