Electrical Characteristics unless otherwise specified

Parameter		Symbol	Value			Unit
			Min	Typ	Max	
		V_{DC}				V
		V_F				V
		I_R				μA
		Q_C				nC
		C				pF
		E_C				μJ

Note2:Pulse test: 300 μs pulse width, 1 % duty cycle

RATINGS AND CHARACTERISTIC CURVES

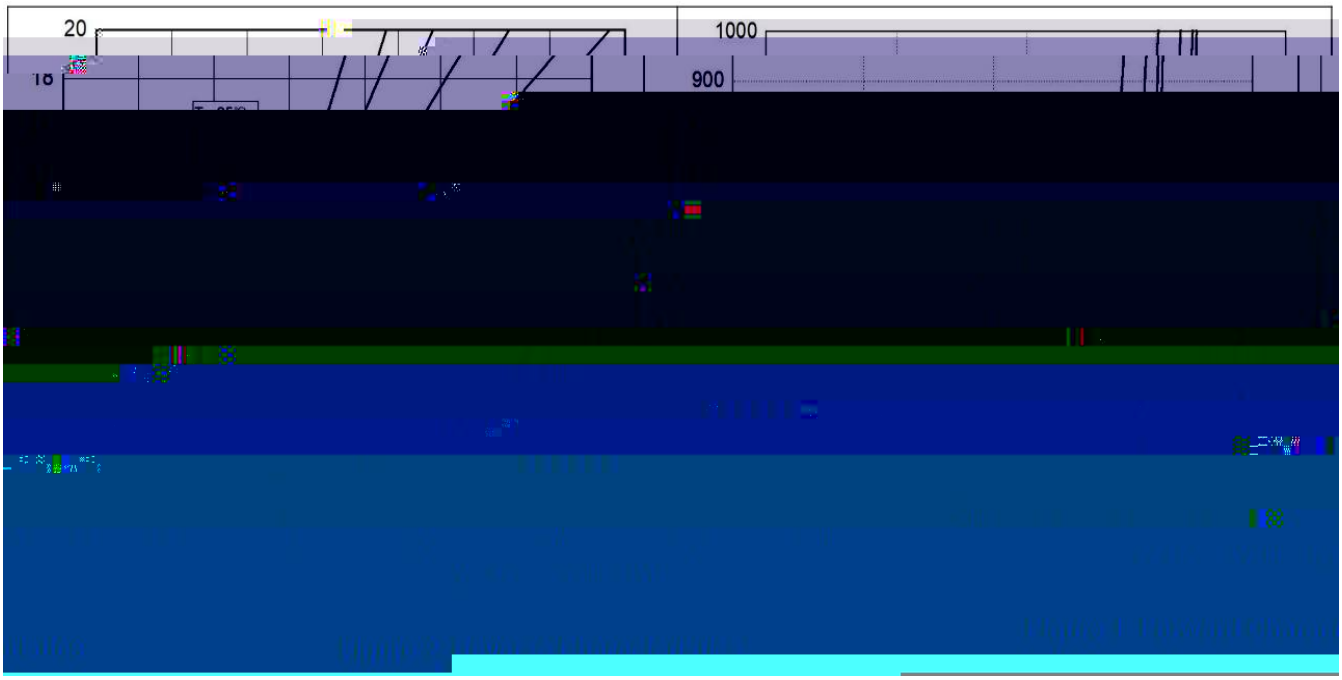

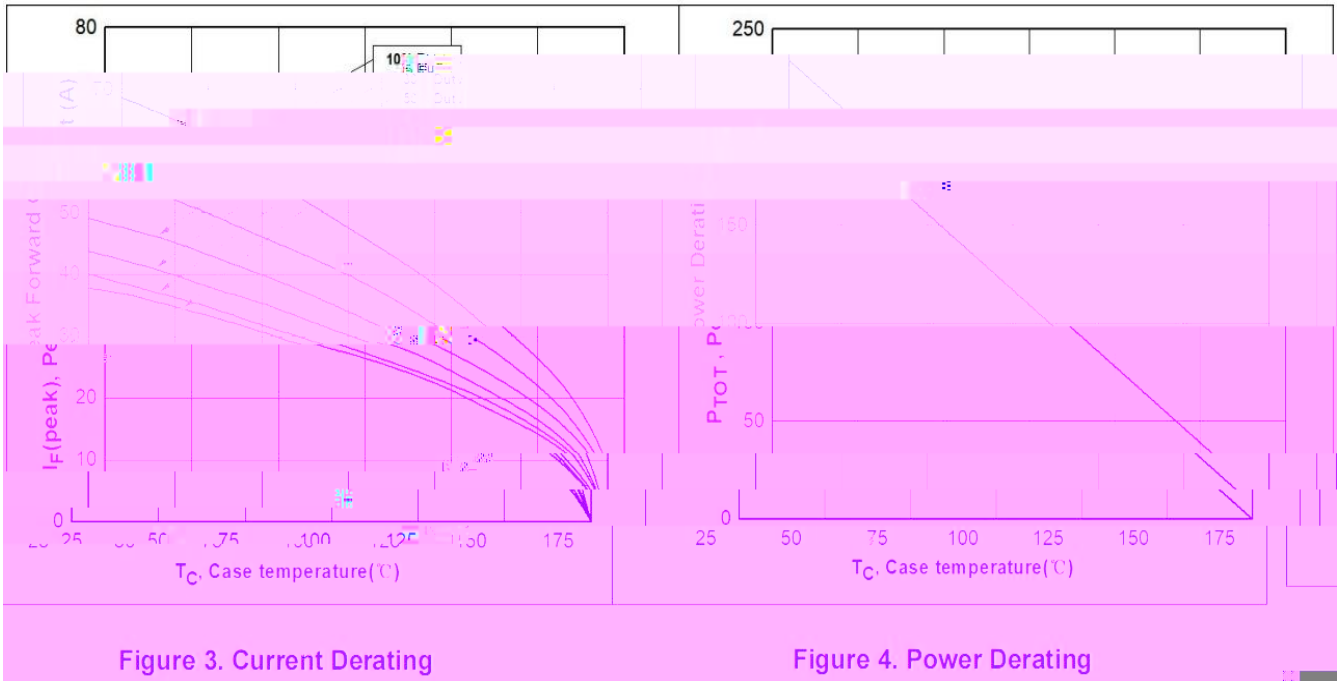

Figure 3. Current Derating

Figure 4. Power Derating

RATINGS AND CHARACTERISTIC CURVES

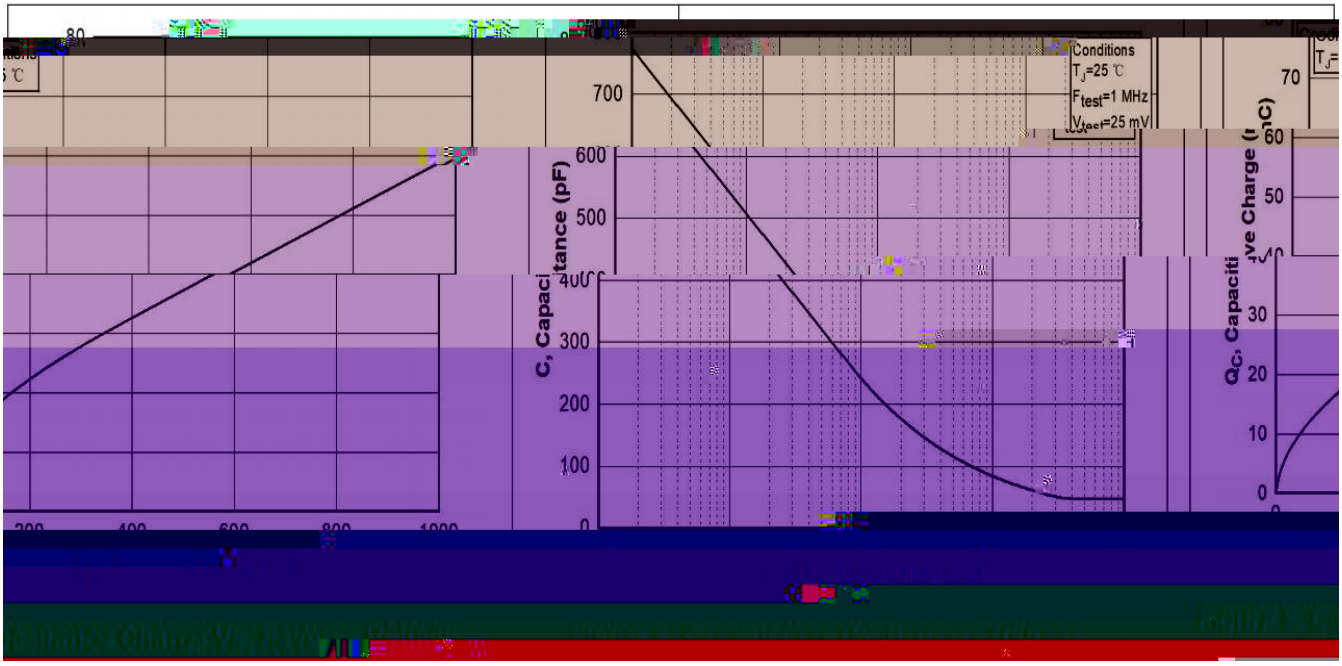

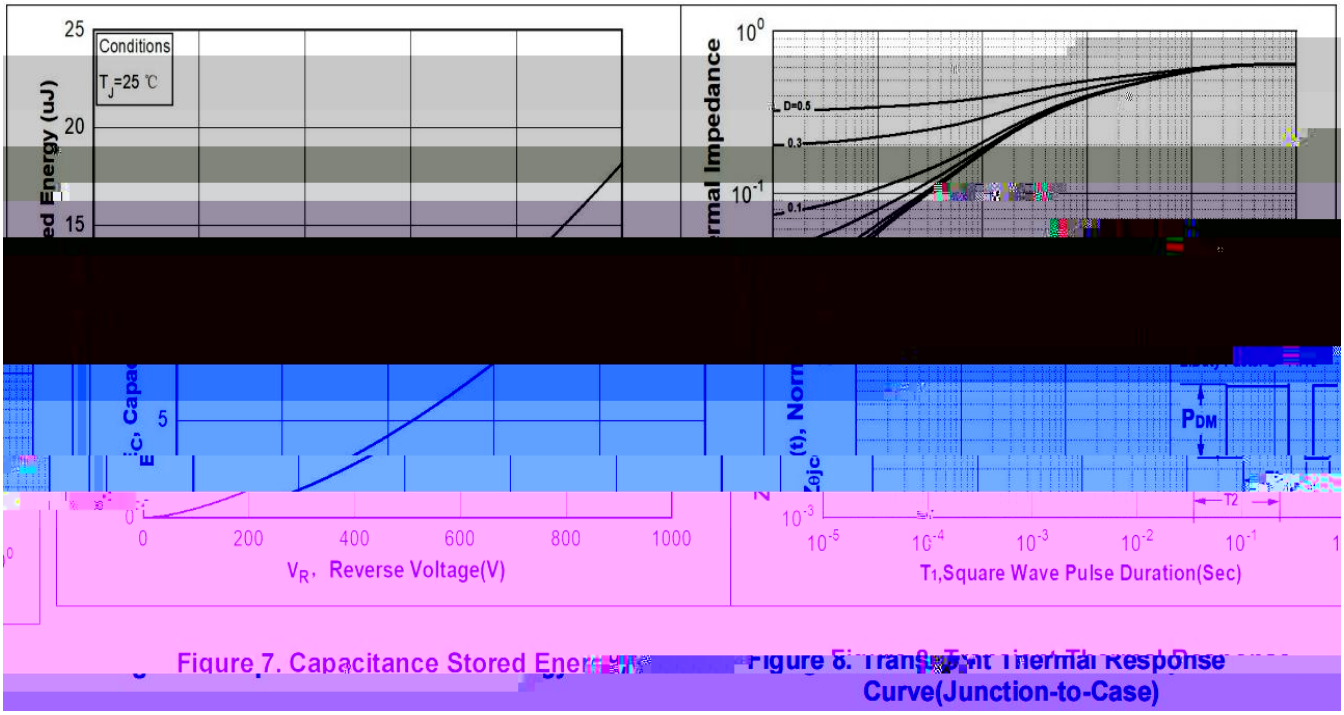

Figure 7. Capacitance Stored Energy

Figure 8. Transient Thermal Response Curve(Junction-to-Case)

The information presented in this